


# Circulation With Pressurized External Barrier Fluid Source and DualFlow™

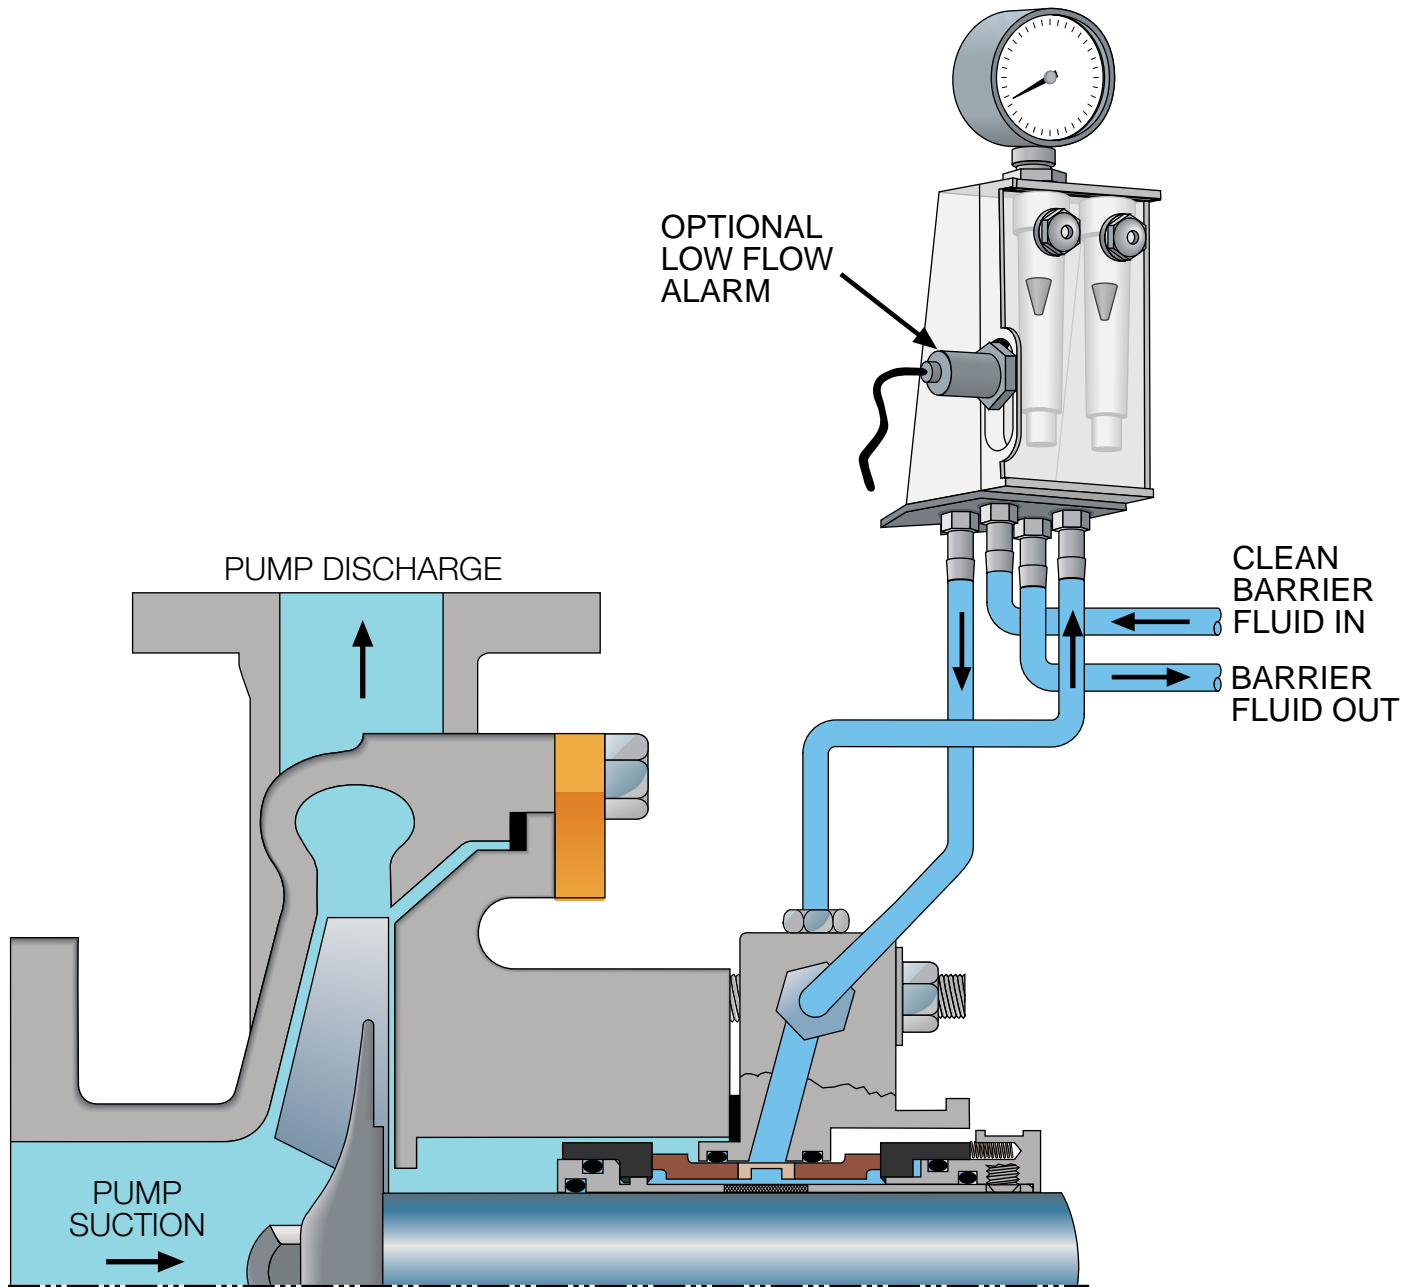

- Use with a dual seal
- Pressurize barrier fluid 15-30 psi over maximum seal chamber pressure
- Barrier fluid should be clean, compatible, and lubricating
- Gland inlet and outlet connections dependent on shaft rotation